


Model LD 4114

Single Point

Aluminum

50-500 kg

Single Point

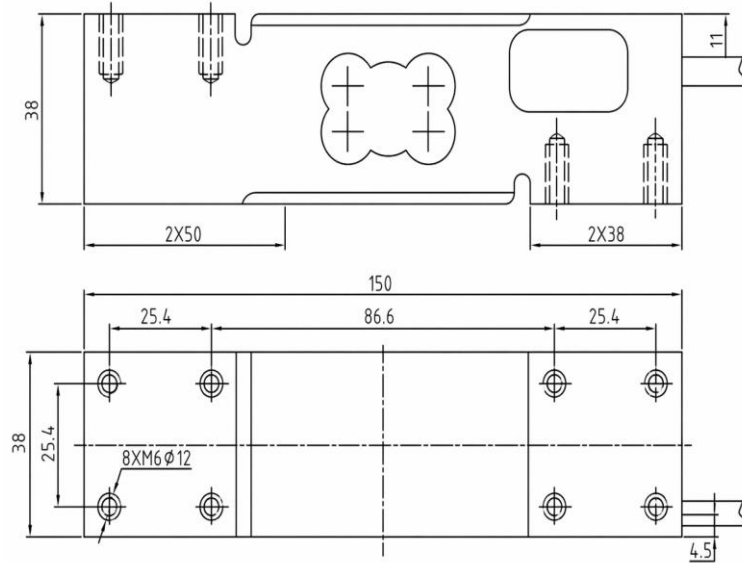

APPLICATION

Suitable for Single Point Belt Weighing, Hoppers, platforms and Packing Machines

FEATURE

Alloy Aluminum, IP 65

SPECIFICATION			
Rated Capacity	50, 60, 100, 150, 200, 250, 300, 500 kg		
Accuracy class	C3	Insulation resistance	≥2000 MΩ
Sensitivity	2.0±0.2mV/V	Operating temperature rated range	-10~+ 40°C
Non-linearity	±0.02% F.S	Temperature service range	-20~+ 60°C
Hysteresis error	±0.02% F.S	Safe load limit	150% F.S
Creep (30min)	±0.02% F.S	Breaking load	200% F.S
Sensitivity temperature deviation	±0.02% F.S/10°C	Excitation rated range	10~12 V DC
Zero temperature deviation	±0.02% F.S/10°C	Cable	1m
Input resistance	404±10Ω	Cable Color Code	+ Excitation Red
Output resistance	350±5Ω		- Excitation Black
Platform maximum size	400x400mm		+ Signal Green
			- Signal White